



CourtWrap & CW Protect

An ultra-removable polypropylene film with a proprietary repositionable, rinsable, reusable adhesive.

Use with matched-component CW Protect laminate for a complete floor graphic solution especially designed for smooth athletic playing surfaces.

APPLICATIONS

- Indoor Athletic Court Floors
- Reusable Travel Team Logos
- Temporary Dance Floor/Event Graphics

CourtWrap

MATERIAL

Face Film	Printable White Multilayered Cast Polypropylene
Back Side	Silver Metallic
Adhesive	Proprietary Long-Term Repositionable Removable Reusable - 25g/m ²
Liner	Clear PET - 5 mil (125μ +/- 10 μ)
Film Thickness	3 mil (75μ +/- 10μ)
FR Certification	Not Tested

DURABILITY


Interior	Up to 4 Years
Exterior	Up to 3 Years - Vertical Exposure under Normal Conditions
Environment	Humidity and Solvent Resistance - Good
Shelf Life	1 Year
Storage Requirements	Stored at 59°F to 77°F (+15°C to +25°C) with a Relative Humidity between 45% to 70%.
Repositionable	Yes

APPLICATION/REMOVAL

Application Temp	+50°F to +86°F (+10°C to +30°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removability	Cleanly Removable with No Adhesive Residue - Adhesion May Increase Depending on Surface and Length of Time
Removal Temp	+50°F (+10°C) or Greater
Exclusions	NOT to be Applied to PVC, Copper, Unpainted Metal, or Acrylic, as the Material May Become Permanent.

Surface must be clean and dry. Prevent contact with solvent or ammonia-based cleaners. For best results, clean with a mild detergent and water and dry thoroughly. For full installation instructions and tips, please refer to "CourtWrap Application Guidelines."

*For critical substrates and all surfaces, please test PRIOR to application.

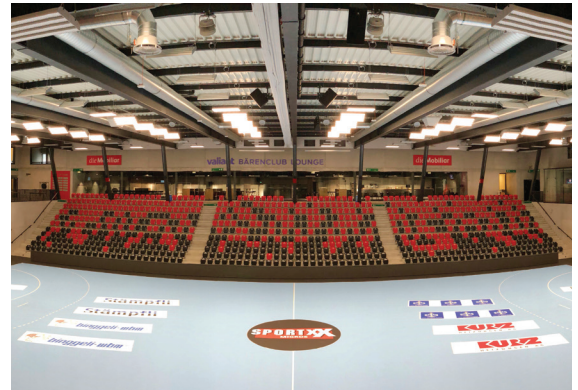

Printing Methods

- Digital - UV & Latex
- Screen Print
- Offset



Material Sizes

- 54" x 100'



Advantages

- Easy Application and Removal for Temporary Athletic Floor Graphics
- Rinsable, Reusable Adhesive Means Graphics May Be Used Again and Again without Loss of Adhesion
- Laminate with Matched-Component CW Protect for Non-Skid Athletic Court Graphics

→ For more information

For additional product information, performance, and warranty guidelines please contact Continental Grafix USA, Inc.

1-704-872-2216 • www.cgxusa.com

CW Protect

MATERIAL

Face Film	Clear Textured PVC
Back Side	Clear
Adhesive	Permanent Clear Solvent - 20g/m ² +/- 3g/m ²
Liner	Siliconized Paper
Film Thickness	7 mil (180µ +/- 5 µ)
FR Certification	Not Tested
Slip Certification	ANSI A137.1/A326.3, R10

DURABILITY


Interior	Up to 1 Year
Exterior	Not Recommended
Environment	Humidity and Solvent Resistance - Good
Shelf Life	1 Year
Storage Requirements	Store at +59°F to +77°F (+15°C to +25°C) with a Relative Humidity between 40% and 65%
Repositionable	No

APPLICATION/REMOVAL

Application Temp	Minimum +50°F (+10°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removal Temp	Minimum +50°F (+10°C)
Laminating Method	Cold, Heat Assist

Surface must be clean and dry. Prevent contact with solvent or ammonia-based cleaners. For best results, clean with a mild detergent and water and dry thoroughly. For full installation instructions and tips, please refer to "CourtWrap Application Guidelines."

**For critical substrates and all surfaces, please test PRIOR to application.*

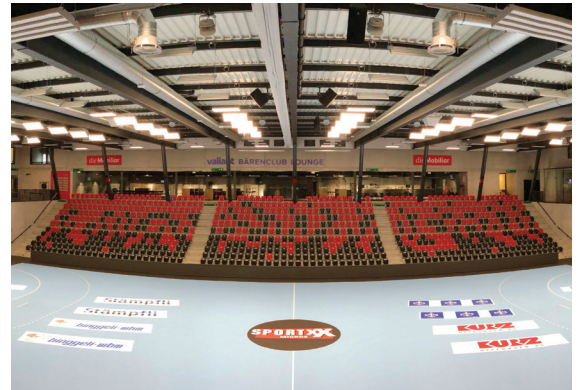

Printing Methods

- Not Applicable



Material Sizes

- 54" x 150'



Advantages

- For Use with CourtWrap or Any Other Flooring Material Where Non-Slip Certification Is Crucial

→ For more information

For additional product information, performance, and warranty guidelines please contact Continental Grapix USA, Inc.

704-872-2216 • www.cgxusa.com